


The unit is designed to protect the main vehicle battery from over discharge by providing a facility to give an audible and visual warning when battery voltage falls below 21V.

### Installation

1. Disconnect the positive battery terminal.
2. Locate suitable areas to mount module, siren and lamp in vehicle dash area and secure.
3. Connect RED lead from unit to the positive terminal of the vehicle battery.
4. Connect WHITE lead from unit to siren and lamp.
5. Connect negative leads from siren and lamp to ground (earth).
6. Connect BLACK lead from unit to vehicle ground (earth).
7. Reconnect the main vehicle battery and test unit.

**Note:** Incandescent globe must be replaced with the same type and voltage. Not suitable for LED operation.

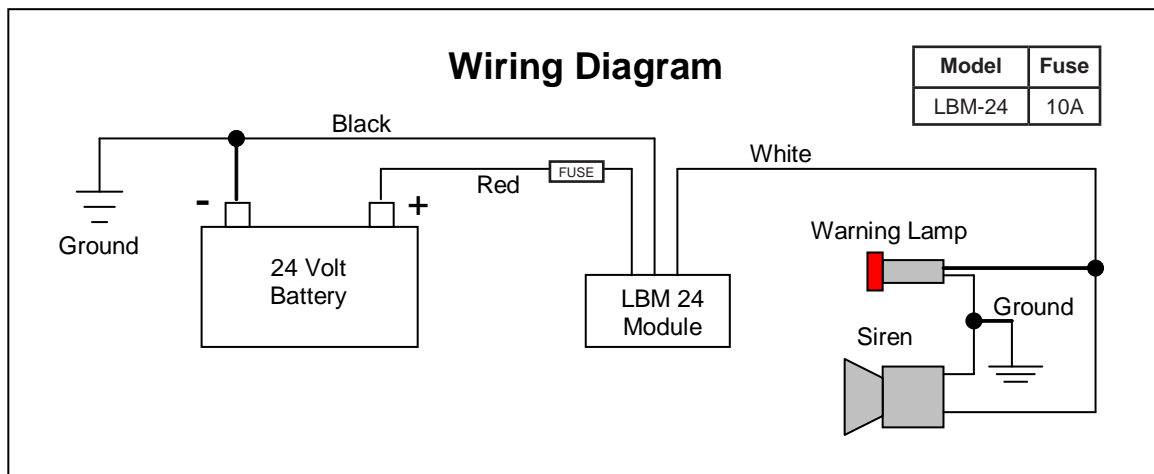

*Warranty Conditions:* The product is warranted to be free from defects in materials and workmanship under normal use and service for a period of 24 months from the date of sale. This warranty covers defective parts and workmanship provided that the product is shipped prepaid to the seller within 24 months of purchase of goods. This warranty is limited to the repair or replacement (at the manufacturers' discretion) of parts and shipping prepaid to the original despatch destination. We regret that no liability can be accepted for consequential or special damages of any kind howsoever arising in connection with products supplied by the seller. This warranty is in lieu of all other warranties expressed or implied. No representative is authorised to assume for the seller any other liability in connection with the seller's products.