




Fluorescent Lamp For T8 Tubes LOW VOLTAGE INVERTERS

Features:

- Sinewave - high efficiency with low current drain
- Protection against reverse polarity connection
- Connection to both input and output via screw terminals located on PCB
- Compact and lightweight aluminium heatsink construction
- Optional extruded aluminium cover available, refer table for applications
- Pre-punched slots at either end of heatsink for ease of installation

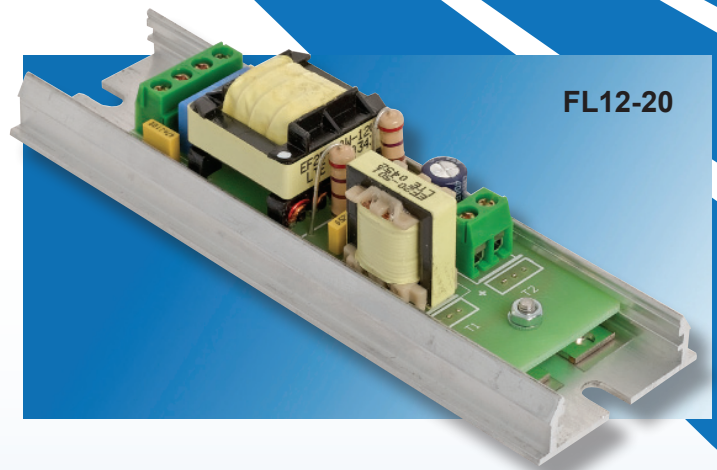

FL12-20

Specifications	FL12-20	FL12-40	FL24-20	FL24-40	FL24-40ST	FL24-20LP
Fluorescent Tube Rating	18W- 24W	30W- 40W	18W- 20W	30W- 40W	30W- 40W	18W- 20W
Operating Voltage	9-15VDC	9-15VDC	20-30VDC	20-30VDC	20-30VDC	20-30VDC
No Load Current	0.39A ± 5%	0.43A ± 5%	0.15A ± 5%	0.1A ± 5%	0.1A ± 5%	0.15A ± 5%
Full Load Current	1.5A ± 5%	2A ± 5%	0.49A ± 5%	0.8A ± 5%	0.8A ± 5%	0.49A ± 5%
Light Loss Protection	No	Yes	No	Yes	Yes	Yes
Dimensions L x W x H (mm)	130x40x30	150x40x30	110x40x30	150x40x30	93x49x40	110x40x30
Optional Cover FLC-1	Yes	Yes	Yes	Yes	Yes	Yes
Pre - Punched Mounting Slots	Yes	Yes	Yes	Yes	Yes	Yes

Note: - These products suit T8 tubes only

CONTACT W: www.gsl.com.au
GSL: PH: (02) 9620 9988