




Low Battery MONITERS AND DISCONNECTS

Features:

Low Battery Disconnects

- Low voltage disconnect to protect battery
- Built in LED indicator
- Spike protected
- Low current drain
- Warning indicator with audible buzzer *
- Light weight construction

* "B" Model Only

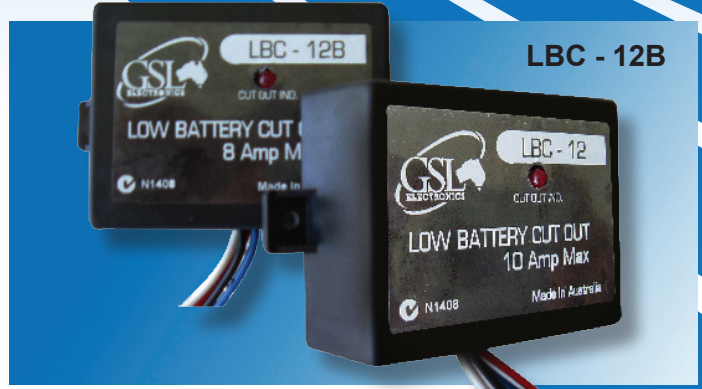

Features:

Low Battery Monitor

- Warns when battery voltage drops to 21V
- Warning indicators via audible buzzer and lamp
- Spike protected
- Low current drain
- Light weight construction



Specifications	LBC-12	LBC-12B	LBM-24
Input Voltage	10V - 14V	10V - 14V	20V - 28V
Max Load Current	10 Amps	8 Amps	-
Output Connection	4 Fly Leads	4 Fly Leads	-
Cut In Voltage	13.4V	13.4V	-
Cut Out Voltage	11V	11V	-
Warnings	- LED	- LED - Audible Buzzer	- Lamp - Audible Buzzer at 22V
Material Type	ABS Plastic	ABS Plastic	ABS Plastic
Dimensions L x W x H mm	85x67x30	85x67x30	85x67x30
Weight	19 Grams	19 Grams	19 Grams

CONTACT W: www.gsl.com.au
GSL: PH: (02) 9620 9988