




24V To 12VDC Single Circuit LINEAR VOLTAGE REDUCERS "Keylink Series"

Features:

- The units are designed to operate efficiently for loads up to the output rating
- Output - fail safe protection to guard communication and electronic equipment against over voltage
- Current limiting under overload, short circuit condition. The unit will respond to overload and short circuit conditions by folding back the output voltage.
- Ideal for communication equipment

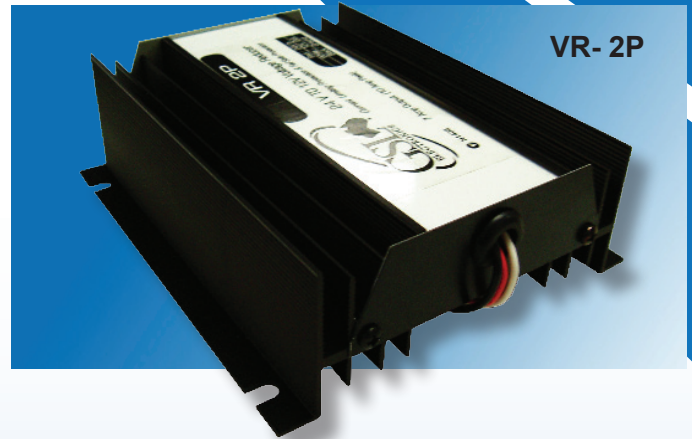

Specifications	VS200	VR 1P	VR 2P	VR 3P	VR 4P
Input Voltage	20 to 30VDC	20 to 30VDC	20 to 30VDC	20 to 30VDC	20 to 30VDC
Output Voltage	13.5V ± 5%	13.5V ± 5%	13.5V ± 5%	13.5V ± 5%	13.5V ± 5%
Output Current	3 Amps	4 Amps	7 Amps	10 Amps	14 Amps
Output current peak rating	3 Amps	6 Amps	10 Amps	15 Amps	20 Amps
Short Circuit Protection	No	No	No	No	No
Input to Output Protection	Yes	Yes	Yes	Yes	Yes
Earth Loss Protection	Yes	Yes	Yes	Yes	Yes
Current Limit	Yes	Yes	Yes	Yes	Yes
Over voltage Protection	Yes	Yes	Yes	Yes	Yes
Connections - fly leads	Yes	Yes	Yes	Yes	Yes
Dimensions L x W x H mm	130x90x40	130x136x47	155x136x47	220x136x47	290x136x47
Weight	0.32Kg	0.5Kg	0.58Kg	0.8Kg	1Kg

CONTACT W: www.gsl.com.au
GSL: PH: (02) 9620 9988